

# INDUSTRIAL

## Power Units

# CURSOR 9

# CURSOR 9

260 kW (354 HP) @ 2100 rpm

Stage III A / Tier 3

### SPECIFICATIONS



No. of cylinders / valves	6L / 4
Injection System	COMMON RAIL 1600 bar
Turbocharger	WG
Displacement	liters 8.7
Bore x Stroke	millimeters 117 x 135
Rated power	kW (HP) @ rpm 260 (354) @ 2100
Max Torque	Nm @ rpm 1500 @ 1400
ATS	-
Certification	Stage III A / Tier 3

### WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1725 x 892 x 1580
Dry Weight	Kg	865

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

### POWER & TORQUE

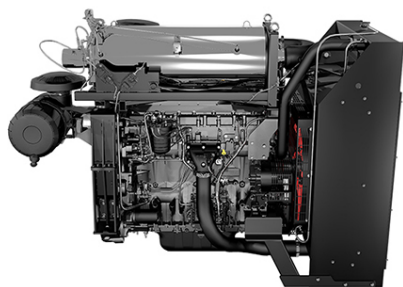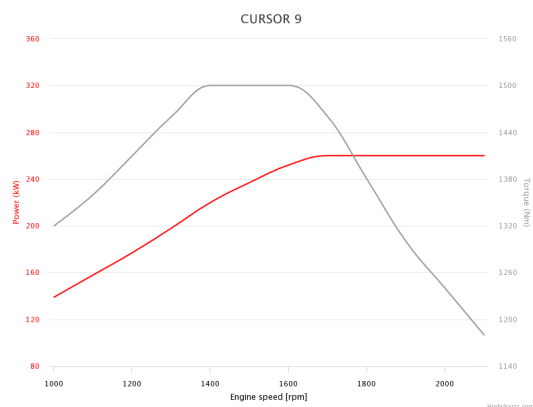

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

#### LEGEND

#### Air Handling

TCA (Turbocharged with aftercooler)

TC (Turbocharged)

NA (Naturally Aspirated)

#### Turbocharger

WG (Wastegate)

VGT (Variable Geometry Turbocharger)

TST (Twin Stage Turbocharge)

#### Exhaust System

EGR (Exhaust Gas Recirculation)

SCR (Selective Catalytic Reduction)

DOC (Diesel Oxidation Catalyst)

DPF (Diesel Particulate Filter)

**LEESGROUP**  
MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+64 9 299 6019 | leesgroup.com

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)  
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

