

INDUSTRIAL

Pumping

CURSOR 9

CURSOR 9


260 kW (354 HP) @ 2100 rpm

Stage III A / Tier 3

SPECIFICATIONS

No. of cylinders / valves	6L / 4
Turbocharger	WG (TCA)
Injection System	COMMON RAIL
Displacement	liters 8.7
Bore x Stroke	millimeters 117 x 135
Rated power	kW (HP) @ rpm 260 (354) @ 2100
Max Torque	Nm @ rpm 1500 @ -
ATS	i-EGR
Certification	Stage III A / Tier 3


POWER & TORQUE

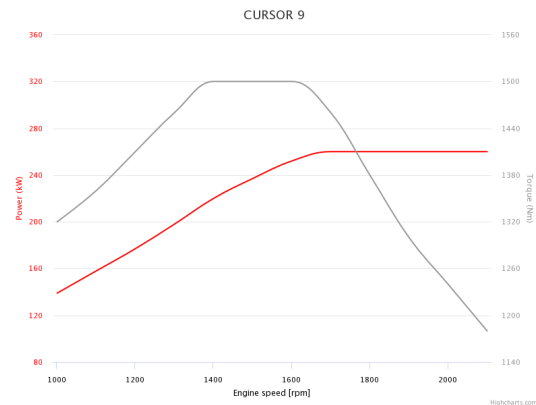

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1253 x 852 x 1008
Dry Weight	Kg	865

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

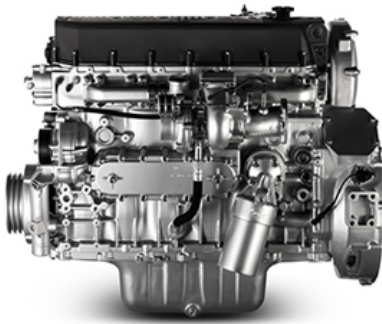

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

INDUSTRIAL

LEGEND

Air Handling

- TC (Turbocharged)
- NA (Naturally Aspirated)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

LEESGROUP

MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+ 64 9 299 6019 | leesgroup.com

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE