INDUSTRIAL
Power Units
N67

N67
129 kW (175 HP) @ 2200 rpm
Stage III A / Tier 3

SPECIFICATIONS

No. of cylinders / valves		6L / 4
Injection System		Mechanical
Turbocharger		WG
Displacement	liters	6.7
Bore x Stroke	millimeters	104 x 132
Rated power	kW (HP) @ rpm	129 (175) @ 2200
Max Torque	Nm @ rpm	770 @ 1250
ATS		-
Certification		Stage III A / Tier 3

POWER & TORQUE

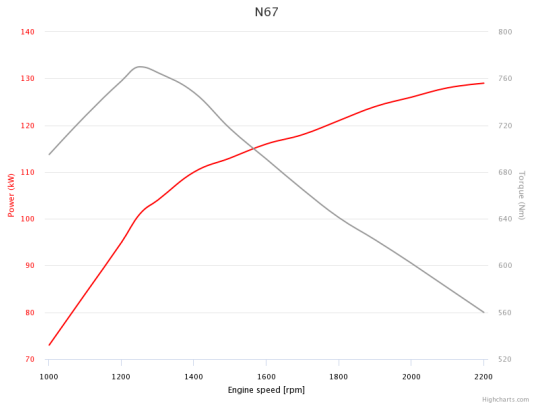

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1708 x 789 x 1222
Dry Weight	Kg	530

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

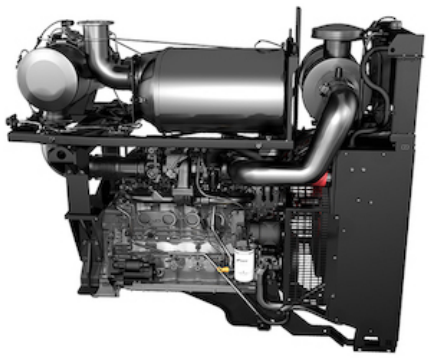

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)

TC (Turbocharged)

NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)

VGT (Variable Geometry Turbocharger)

TST (Twin Stage Turbocharge)

Exhaust System

EGR (Exhaust Gas Recirculation)

SCR (Selective Catalytic Reduction)

DOC (Diesel Oxidation Catalyst)

DPF (Diesel Particulate Filter)

LEESGROUP
MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+64 9 299 6019 | leesgroup com

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE