

SPECIFICATIONS


No. of cylinders / valves	4L /4
Injection System	Mechanical
Turbocharger	WG
Displacement	liters 4.5
Bore x Stroke	millimeters 104 x 132
Rated power	kW (HP) @ rpm 66 (90) @ 2200
Max Torque	Nm @ rpm 400 @ 1250
ATS	-
Certification	Stage III A / Tier 3

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1257 x 830 x 1075
Dry Weight	Kg	410

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

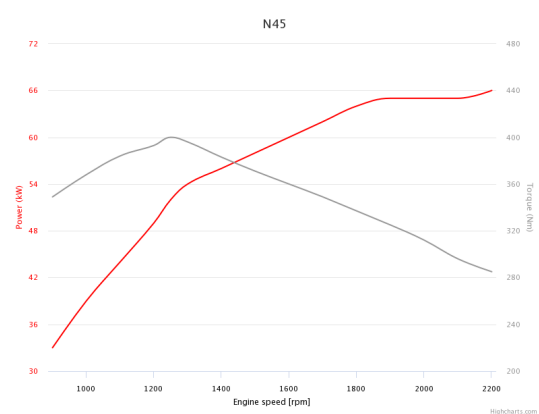

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

LEGEND

Air Handling

- TCA (Turbocharged with aftercooler)
- TC (Turbocharged)
- NA (Naturally Aspirated)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

LEESGROUP
MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+64 9 299 6019 | leesgroup.com

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE