

SPECIFICATIONS


No. of cylinders / valves	4L / 2
Injection System	Mechanical
Turbocharger	WG
Displacement	liters 3.2
Bore x Stroke	millimeters 99 x 104
Max power	kW (HP) @ rpm 65 (87) @ 2300
Max Torque	Nm @ rpm 350 @ 1300
ATS	-
Certification	Stage III A / Tier 3

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1165 x 695 x 862
Dry Weight	Kg	300

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

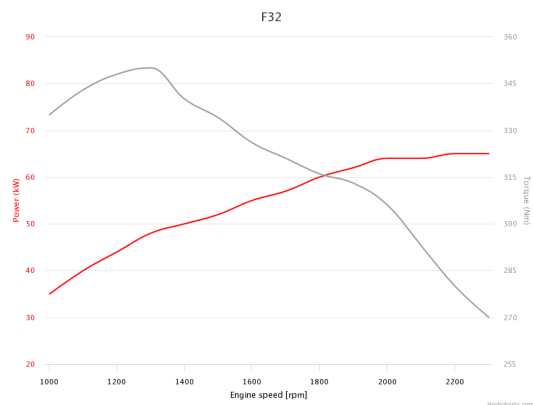

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

LEGEND

Air Handling

- TCA (Turbocharged with aftercooler)
- TC (Turbocharged)
- NA (Naturally Aspirated)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

LEESGROUP
MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+64 9 299 6019 | leesgroup.com

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE