

SPECIFICATIONS

No. of cylinders / valves	4L / 4
Turbocharger	WG (TCA)
Injection System	COMMON RAIL
Displacement	liters 4.5
Bore x Stroke	millimeters 104 x 132
Rated power	kW (HP) @ rpm 104 (141) @ 2200
Max Torque	Nm @ rpm 608 @ -
ATS	i-EGR
Certification	Stage III A / Tier 3

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	810 x 687 x 901
Dry Weight	Kg	410

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

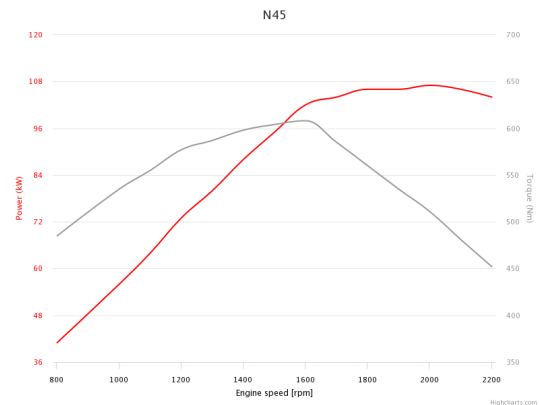

LEGEND

Air Handling

- TC (Turbocharged)
- NA (Naturally Aspirated)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

LEESGROUP

MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+ 64 9 299 6019 | leesgroup.com

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE